





TRUSMART

**Smart Changeover
Manual
(120A 26KVA Max)**




DEVICE DESCRIPTION

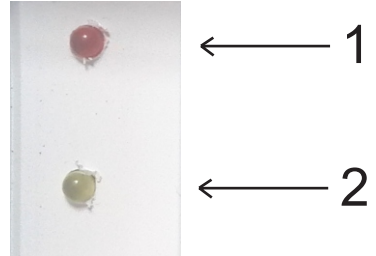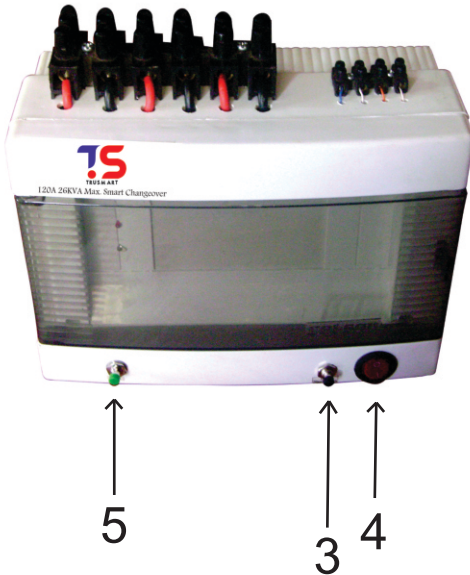

1. NEPA light indicator.
2. GEN light indicator.
3. GEN shutdown switch (Press and hold for 5secs to shutdown GEN).
4. Manual override - When turned ON, it puts the output on GEN even if NEPA power is restored.
5. GEN start button.

INSTALLATION INSTRUCTIONS

1. Mark positions where you will like to install the device and mount a meter board on that position and screw the Smart Changeover on the meter board.
2. Connect the wiring of the home to the device as illustrated below

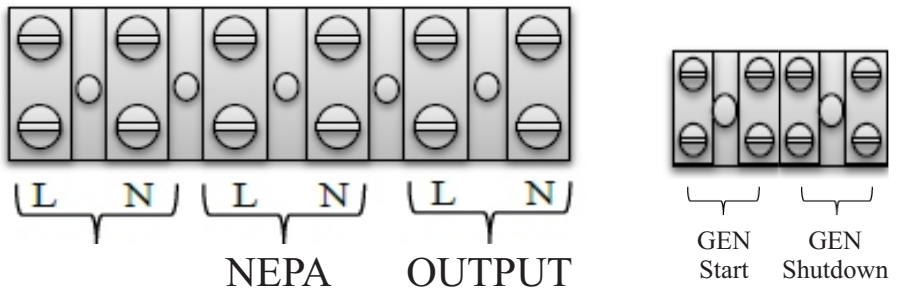

3. Connect wires from the terminal labeled GEN start and GEN Shutdown in the device to the switch of the generator start and shutdown respectively.

NB: GEN Start and Shutdown wire from the GEN should be connected through a socket and 13A plug so that the GEN can easily be moved conveniently in the event of maintenance.

Features

- ✦ It switches power output from Gen to NEPA and vice versa
- ✦ It shuts down your Gen automatically when NEPA power is restored
- ✦ Built with a switch to shut down your Gen from the comfort of your room.
- ✦ Can be used on any type of domestic generator, key starter or not.
- ✦ Surge protection to protect your appliances from damaging

Capacity:

120A 26000VA Maximum output.

Precaution:

Not to be placed where water can get to it.



Support Line:

+2349061815505

www.trusmart.com.ng

24 months warranty